

Back side

**30** YEAR LINEAR POWER WARRANTY  
**25** YEAR PRODUCT WARRANTY



**PERC TECHNOLOGY | BIFACIAL CELLS**



**MODULE FIRE PERFORMANCE: TYPE 4**



**ANTI-REFLECTIVE GLASS**



**QBE INSURANCE**  
Product Liability Insurance QBE

## DR10H550MB

### HALF CELL LINE

 HALF-CELL MODULE

The 144 Half Cut module of the Import Line combines the high production efficiency of the half cell technology with an excellent quality / price ratio.

The half-cell configuration improves the electrical distribution inside the panel to increase the yield of the product. In addition, this product uses bifacial cells, which allows sunlight to be captured on both sides of the module, further increasing overall efficiency. For these reasons, the Half Cell Line is suitable not only for industrial installations but also for residential and commercial installations.

#### Cells



144 CELLS  
MONO gBB / 10BB M10 HALF | PERC

182 x 91 mm / 7.16 x 3.58"

#### Frame



COMPACT AND STURDY | 35 mm

ANCHORABLE ALSO ON  
THE SHORT SIDE <sup>(5)</sup>

# HALF CELL LINE

## Electrical Characteristics (STC) <sup>(1)</sup>

DR10H550MB

Nominal Output (Pmax) <sup>(2)</sup>	550 W
Sorting Tolerance	0/+5 W
Voltage at Pmax (Vmp)	40.90 V
Current at Pmax (Imp)	13.45 A
Open Circuit Voltage (Voc) <sup>(2)</sup>	49.62 V
Short Circuit Current (Isc) <sup>(2)</sup>	14.03 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	30 A
Module Efficiency	21.28%
Protection class against electric shock	Class II

## Mechanical Characteristics

Solar Cells	144 M10 HALF monocrystalline PERC
Solar Cells Size	182 x 91 mm / 7.16 x 3.58"
Front Cover	3.2 mm / 0.13" thick, low iron tempered glass
Back Cover	Transparent backsheet
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silver
Backsheet finishing	Transparent
Diodes	3 Bypass diodes serviceable
Junction Box	IP68 rated
Connector	MC4 or compatible connector
Cables Length	1200 mm / 47.24"
Cables Section	4.0 mm <sup>2</sup> / 0.006 in <sup>2</sup>
Dimensions	2279 x 1134 x 35 mm / 89.72 x 44.65 x 1.37"
Weight	29 Kg / 63.93 lbs
Max Load (Test Load) - SF	5400 Pa - 1.5 <sup>(3)</sup>

## Temperature Characteristics

NMOT <sup>(3)</sup>	45±2 °C
Temperature Coefficient of Pmax	-0.37 %/°C
Temperature Coefficient of Voc	-0.29 %/°C
Temperature Coefficient of Isc	0.05 %/°C
Operating Temperature	-40 °C - +85°C


## Packaging <sup>(4)</sup>

Pallet dimensions	2310 x 1130 x 1270 mm / 90.94 x 44.49 x 50.00"
Pieces per pallet	31
Weight	933 kg / 2056.91 lbs


## Certifications

Fire Performance Rating	Type 4
Product Certificate	UL 61730

## Dimensions

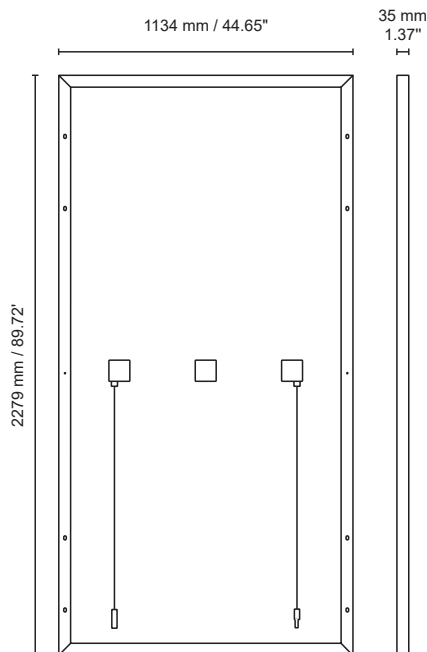

## Current/Voltage Characteristics

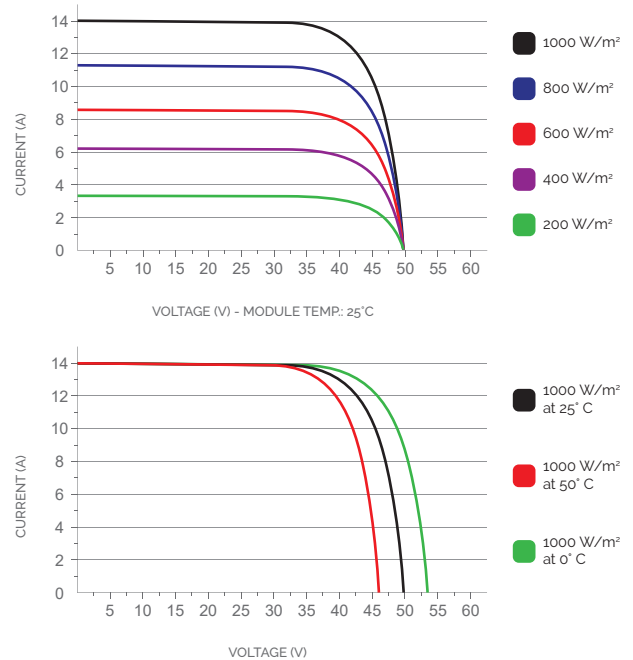

1. STC: (Standard Test Condition) Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

2. Pmax, Voc, Isc measurement tolerance: ±3%

3. NMOT: Nominal Module Operating Temperature. Irradiance 800W/m<sup>2</sup>, Air 20°C, Wind speed 1m/s

4. Pallets can be stacked up to two

5. Consult the installation manual for the relative mounting configurations

It is important to point out, that all technical specifications, information and figures contained in this datasheet are estimated values. Peimar reserves the right to change the technical specifications, information and figures contained in this document at any time without notice.

EN-CA\_2024\_12\_00

**PEIMAR**  
ITALIAN PHOTOVOLTAIC MODULES