


# OR10H560M

OR Series – 560 W

144 cells

MONO M10 HALF | PERC

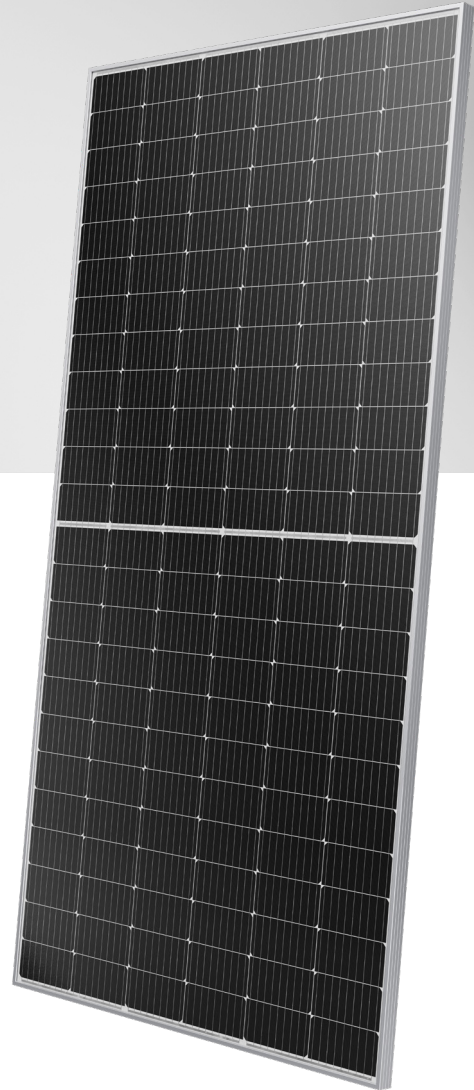

#### Extra-EU module

Manufactured in our production factory



#### PERC monofacial technology



#### Anti-reflective glass

Maximum efficiency and high performance



#### Compact and sturdy frame

Anchorable also on the short side <sup>(5)</sup>



#### Class of reaction to fire

Class 1 (UNI 9177),  
B-s1, d0 (EN 13501-1)  
B<sub>ROOF</sub>(t1) (EN 13501-5)



#### 30 years

Linear power warranty

#### 25 years

Product warranty



#### QBE Insurance

QBE Product Liability Insurance

QBE is a global leader in the insurance sector, offering comprehensive solutions for business risk management. With a worldwide network, it protects clients against a wide range of risks and provides flexible insurance solutions tailored to various industries, including the energy sector.

## Electrical Characteristics (STC) <sup>(1)</sup>

Nominal Output (Pmax) <sup>(2)</sup>	560 W
Sorting Tolerance	0/+5 W
Voltage at Pmax (Vmp)	40,86 V
Current at Pmax (Imp)	13,7 A
Open Circuit Voltage (Voc) <sup>(2)</sup>	48,29 V
Short Circuit Current (Isc) <sup>(2)</sup>	14,53 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	25 A
Module Efficiency	21,67%
Protection class against electric shock	Class II

1. STC: (Standard Test Condition) Irradiance 1000W/m<sup>2</sup>; Module Temperature 25 °C; Air Mass 1,5  
 2. Pmax, Voc, Isc measurement tolerance: ±3%

## Mechanical Characteristics

Solar Cells	144 M10 HALF monocrystalline <b>PERC</b>
Solar Cells Size	182 x 91 mm / 7,16 x 3,58"
Front Cover	3,2 mm / 0,13" thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silver
Backsheet finishing	White
Diodes	3 Bypass diodes serviceable
Junction Box	IP68 rated
Connector	MC4 or compatible connector
Cables Length	1300 mm / 51,18"
Cables Section	4,0 mm <sup>2</sup> / 0,006 in <sup>2</sup>
Dimensions	2279 x 1134 x 30/35 mm / 89,72 x 44,65 x 1,18/1,38"
Weight	26,8 kg / 59,08 lbs
Max Load (Test Load) – SF	5400 Pa – 1,5 <sup>(5)</sup>

5. Consult the installation manual for the relative mounting configurations

## Temperature Characteristics

NMOT <sup>(3)</sup>	43±2 °C
Temperature Coefficient of Pmax	-0,29 %/°C
Temperature Coefficient of Voc	-0,25 %/°C
Temperature Coefficient of Isc	0,046 %/°C
Operating Temperature	-40 °C ~ +85 °C

3. NMOT: Nominal Module Operating Temperature; Irradiance 800 W/m<sup>2</sup>; Air 20 °C; Wind speed 1 m/s

## Packaging <sup>(4)</sup>

Pallet dimensions	2300 x 1130 x 1265 mm / 90,6 x 44,5 x 49,8"
Pieces per pallet	31 / 36 / 37


Weight	859 kg / 1893,77 lbs (31 pieces per pallet)
	998 kg / 2200,21 lbs (36 pieces per pallet)
	1026 kg / 2261,94 lbs (37 pieces per pallet)

4. Pallets can be stacked up to two

## Certifications

Reaction to Fire	Class 1 (UNI 9177), B-s1, d0 (EN 13501-1), B <sub>ROOF</sub> (t1) (EN 13501-5)
Product Certificate	IEC 61215-1, IEC 61215-1-1, IEC 61215-2, IEC 61730-1, IEC 61730-2

## Dimensions

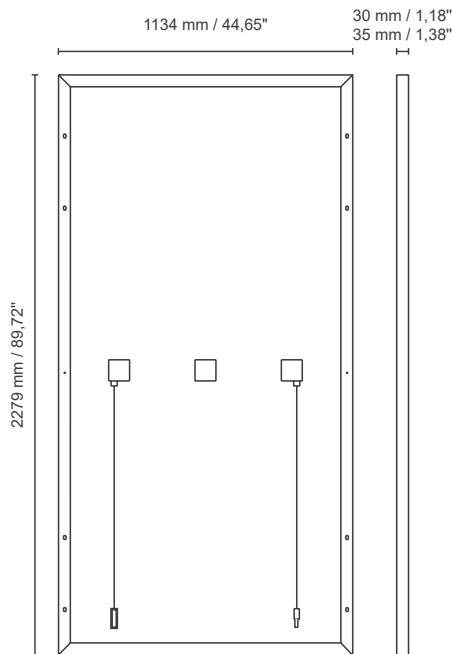

## Current/Voltage Characteristics

